

JTElectronics

SPDT Momentary Toggle Switch


Model: JTEMOM1



This is a Single Pole Double Throw (SPDT) miniature toggle switch which automatically returns to the centre “OFF” position when released. Its characteristics are sometimes described as “MOM-OFF-MOM” to indicate each side position is momentarily ON while the switch is operated and has a centre OFF position that it automatically returns to when the switch is released.

It is ideal for operating model railroad point motors via a CDU power source due to it returning automatically to the centre OFF position, allowing other point control switches to be successfully operated.

SPECIFICATIONS:

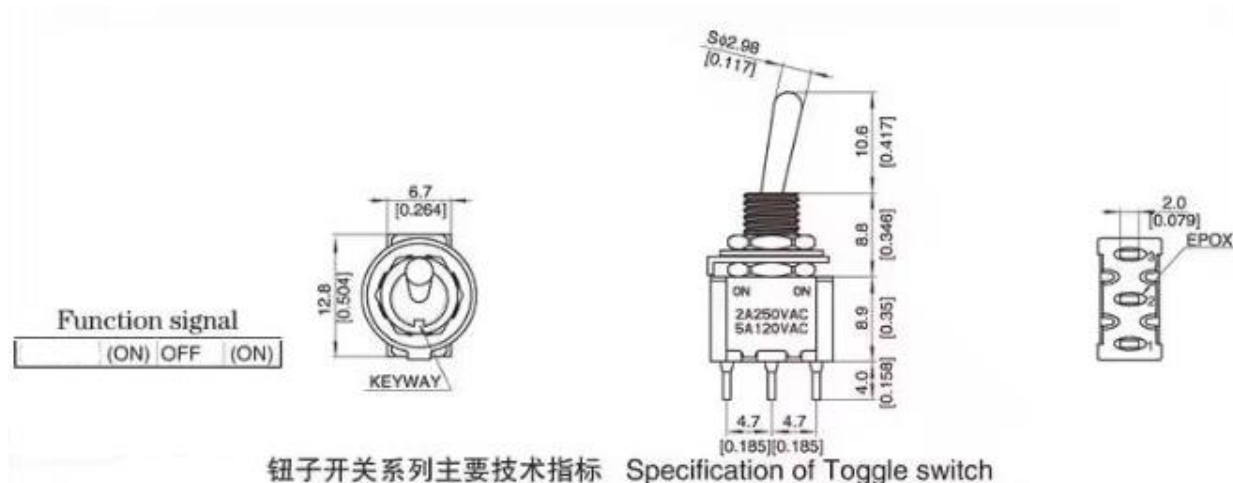

钮子开关系列主要技术指标 Specification of Toggle switch

规格 Specifications	刻印于盖板上 (如 2A 250VAC, 5A 120VAC 字样及功能信号标志)		
操作温度 Working Temperature	-40℃~+85℃	耐压 Withstand Voltage	AC1500V/min
接触电阻 Contact Resistance	≤ 0.02Ω	操作力 Operating Force	2~15N
绝缘电阻 Insulation Resistance	≥ 1000MΩ	寿命 Life	>10000 次循环

WIRING INFORMATION

You should wire the CDU power source positive wire to the switch centre terminal, and the two outside switch terminals are wired to each respective point motor coil. The other point motor common wire is connected back to the CDU power source negative wire.

